



Repair Service Corporation, PO Box 818, Lake Zurich, IL 60047  
Phone: 847-726-9560 Fax: 847-726-9561 www.RepairServiceCorp.com

November 3, 2017

**ATTN:** Jennifer Hosier  
Supervisor of Operations  
Auburn WPC  
2010 South Wayne Street  
Auburn, IN 46706

**P# 260-925-1714**

**RE:** Reline wall of 2100 gallon Sodium Hypochlorite Tank

We are pleased to confirm our quote on the reline work as designated by you per our Jobsite visit.

**Scope of Work**

Repair Service Corporation will furnish labor, equipment and material to:


- 1) Grind 9' of straight side of wall and prep.
- 2) Apply a 110 mil new corrosion barrier to wall.
- 3) Corrosion barrier to consist of four layers of 1.5 oz chopped glass and one layer nexus veil. A finish wax coat to be applied last.
- 4) All resin used would be Derakane 411 or equivalent resin with MEKP cure system with post cure.
- 5) Replace one 1" dia. flanged fitting.
- 6) Replace one 2" dia. flanged fitting
- 7) Provide one new 24" dia. Side Bottom Manway Gasket (Garlock XP Stress Saver).
- 8) Attendant, Gas monitor, Harness & Lifeline, Rescue retrieval Equipment.
- 9) Standard PPE consisting of Hard Hat, Safety glasses, Gloves, Tyvek suit.
- 10) Qualifications for this work are listed below under safety Qualifications.

The following items to be supplied or done by others:

- A) Removing and replacing connecting piping.
- B) Electric provided to work areas.
- C) Clean and dry work areas.
- D) Warm Dry staging area for resin materials.
- E) Rescue Team

All FRP materials to be equal to or better than the construction of existing equipment.

**Allow 24 hours at 60 degrees F or above for proper curing time.**

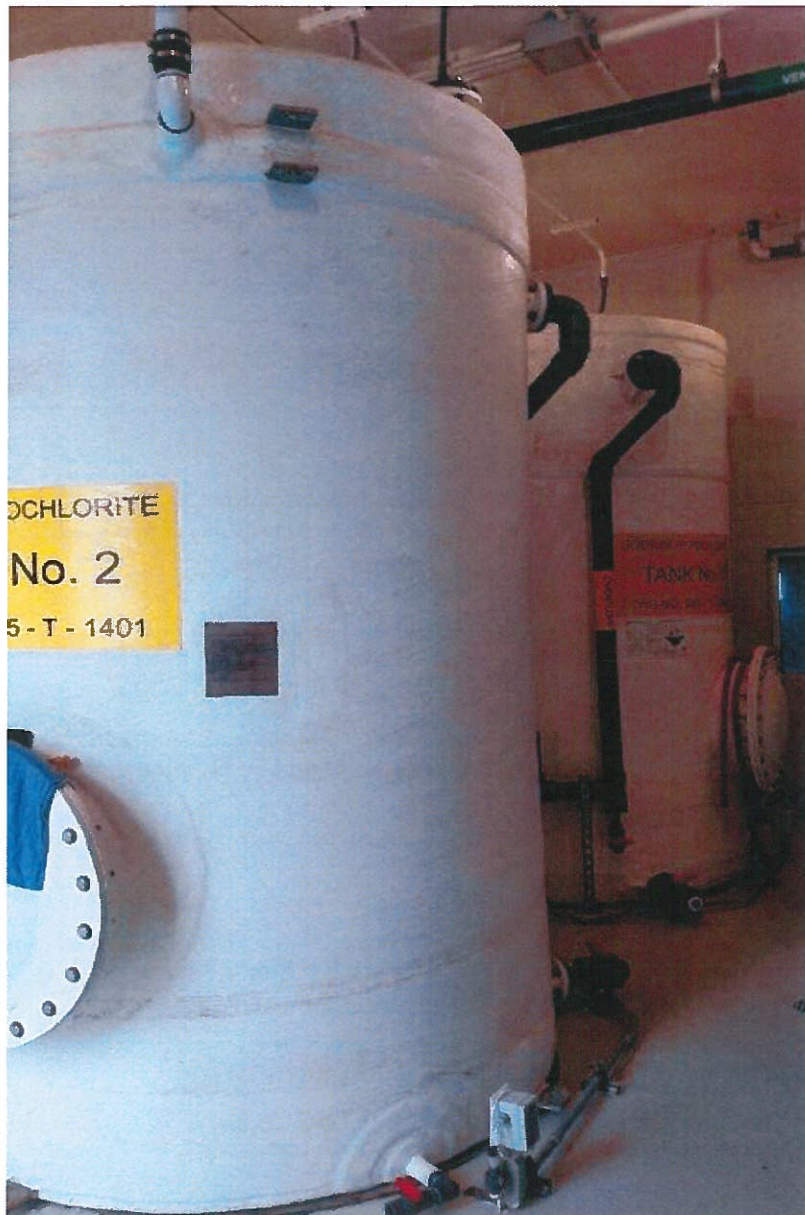

## **Requirements Prior to starting job**

All Lockout Tagout procedures inspected and completed.  
Confined space procedures discussed before starting job.  
Tank must be vented before starting job.  
Tank and/ or area to be worked in must be clean and dry.

## **Host Company Personnel**

*All of the host company's personnel to be stay clear of work area until Repair Service's work is completed. All personnel that have to be in or around the work area will be notified of possible chemical hazards produced by the Fiberglass resin work process. This notification will be done prior to job start date. Explanation of the chemical hazards can be done by Repair Service or by your Safety Manager using your company's Hazard Communication program. Host Company to supply any safety equipment and training needed for employees working in the area of the resin work. MSD sheets on chemicals we use are available from Repair Service Corporation's safety manager or job foreman.*

## **Approval of Job Conditions**

These procedures will be subject to our inspection and approval. During our inspection we will lockout and tag all equipment that relates to each job. Equipment must be removed or blinded if unable to be locked out. This work to be done by a competent qualified person from the Host Company.

You must meet all safety requirements before starting time. Failure to have this done subsequent to starting date will result in additional charges per person, per hour.

## **Safety Qualifications for RSC Personnel**

Safety training is provided annually by Safety Training Services and Three Rivers Safety Training center. We are also members of the ISNetworld contractor data base. We are also have the below safety training;

Osha 10	Random Drug Testing
Confined space	Background checks
Respiratory Training	Forklift
Medical evaluation	Aerial lift
Pulmonary Function Test	Rigging
Hearing testing	Hazwopper
First Aid CPR/AED	GHS (Global Harmonized System)

RSC personnel are updated monthly on new procedures and OSHA requirements. Copies of their certification are available upon request.

## **Guarantees**

Repair Service Corporation guarantees against defects in material or workmanship furnished under this order and will repair any part found to be defective within one year.

The guarantees herein shall not be binding upon Repair Service Corporation unless all payments, called for by the terms of this order, are and continue to be paid on dates specified.

Repair Service Corporation shall not be held liable for any direct or consequential damage or loss resulting from equipment defective in material or workmanship, or from any other occurrences of any kind or character and shall not be held liable for any loss or damage.

**Cost**

We feel the above work can be accomplished provided no unforeseen problems are encountered for the sum of **\$15,248.00.** This cost includes Travel Expenses.

If the job site conditions are more favorable than anticipated the cost savings would be passed on to you.

*\*Price is based on all work being done during regular work hours no Saturdays, Sundays or Holidays.*

*\*Any work stoppage beyond our control could result in additional labor or material charges.*

**Job Schedule: 2 men, 5 days**

All quoted prices are good for 30 days unless otherwise noted.

**Payment Terms:** 1% 10 or Net 30 days.


Finance Charge: A 1.5% per month charge will be added to all invoices more than 30 days past due (Annual percentage rate 18%).

We appreciate the opportunity of quoting on this work and look forward to being of service to you.

**REPAIR SERVICE CORPORATION**

Tracy Baldaccini

**Auburn WPC**

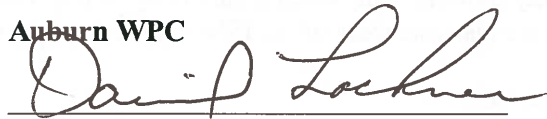A handwritten signature in dark ink, appearing to read "David Lockman", written over a horizontal line.

Representative